

SU10 COMMERCIAL CENTRE POLE UMBRELLA



Features at a glance

- Commercial grade aluminium frame structure
- Stainless steel hardware for longevity
- Durable high performance hub and fittings
- Telescopic mast enables umbrella to clear most furniture when closing
- Robust 82.5mm diameter mast with 3.4mm wall thickness
- Protection Cover included
- Tough, commercial grade 50 x 25mm strut arm profile

Accessories



Rain Gutter

Adjoining square umbrellas can be connected with removable rain gutters to increase weatherproof area.

Canopy

- Marine solution-dyed fabric
- Waterproof Rating: >300mm water column
- Maintenance: All fabrics can be washed and replaced
- Weight: 315 g/m2
- Colourfastness: 7-8/8
- Shade Rating: UPF 80 UV Protection

RECASENS BCN n 1886

Stock Colours



Charcoal Tweed



Special-Order Colours**







**Other Special Order Colours available on request.

BEST-IN-CLASS WARRANTY







SU10

COMMERCIAL CENTRE POLE UMBRELLA

Size & Configuration

4.0m 5.0m 5.0m

Mounting Options

Surface Plate For deck, patio and concrete mounting.



In-Ground Anchor For mounting with

For mounting with a concrete footing.



Free-Standing Base + Aluminium Base Cover

For complete customised manoeuvrability.



Optional Castor Wheels shown. Note – Concrete Pavers are required for ballast (not supplied).

Umbrella Dimensions



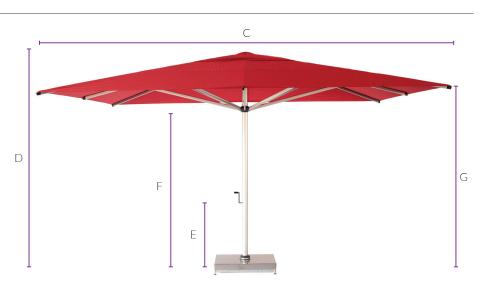


Diagram Legend		4.0m Square	5.0m Square	5.0m Octagon
Α	Closed Canopy Clearance***	900mm	730mm	1040mm
В	Overall Height When Closed***	3740mm	4280mm	3530mm
С	Canopy Width	4000mm	5000mm	4600mm
D	Overall Height***	2870mm	3120mm	2810mm
E	Winder Handle Height***	840mm	920mm	840mm
F	Hub Height***	2110mm	2260mm	2150mm
G	Arms Height***	2270mm	2470mm	2270mm

^{***}Free-Standing Base installations will add 177mm to the height and surface plates will add 19mm to the height. Adding Free-Standing Base wheels will add a further 45-80mm. All sizings are approximate only and subject to change without notice.



Contact us for information and advice

07 3170 6218 vcustomblinds.com.au

